


## Face with Finger Attendance cum Simple Access Control System

### AP Electronics

49, Amrapali Society,  
B/h Amrapali Complex, Karelibaug,  
Vadodara 390 018. INDIA.  
Ph. : +91 265 2490955 / 977  
info@apelectronicsindia.com

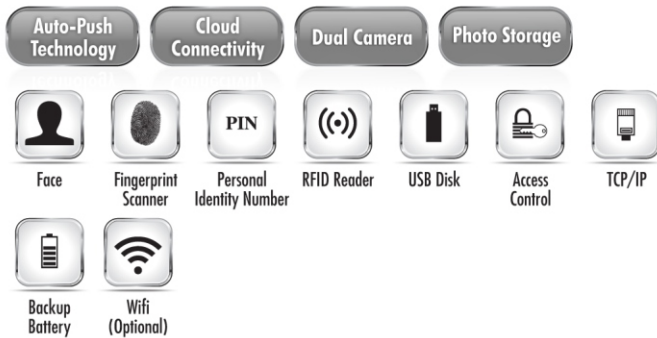

<b>Specifications</b>	» Face capacity	1000
	» Card capacity	5000
	» Fingerprint capacity	5000
	» Max Attendance log	300,000
	» Management log	10000
	» Identify mode	Face, Fingerprint, card, password and combinations
	» Display language	English
	» LED	1 (Red-Green dual color)
	» Wiegand input	Inside and outside Wiegand(26/34)
	» Communication	TCP/IP, WIFI (optional)
	» U-disk	Supported
	» Audio output	Voice Interface
» Battery	3 Hours Battery Backup	
» Working voltage	DC12V ± 5%(current : below 1.5A)	
» Working temperature	-10°C~ +60°C	
» Working humidity(RH)	20% ~ 80%	
» Self-test function	Supported	
» Power management	Sleep Mode	
» FAR/ FRR	0.001/1(%)	
» Identify speed	≤1.0 seconds	
» Matching mode	Supports 1:N	
» FAR/ FRR	0.00001/0.1(%)	
» Identify speed	≤1.0 second (when enrolled 5000 fingerprints)	
» Fingerprint input angle	360°(any angle)	
» Intelligent adaptation function	Support	
» Matching mode	Support 1:N	